

Under Pillow Lighting™ Light Board Installation

This instruction outlines the procedure for installing Under Pillow Lighting Boards.

Tools Required:

Phillips Screwdriver

Kit Contents (see *Figure 1* below)

A. Light Board




Figure 1 - Pillow Light Board Kit

Replacing Light Boards

Note: Make sure the spa is turned off.

Step 1. Control Box Light Board Installation

1. Disconnect power to the spa.
2. Remove Equipment Compartment door.
3. Unscrew center screws on the Control Box and remove cover.
4. Unplug LED Harness(es), up to 3, and any other components that may be plugged into the board.
6. Unplug Light Board (See A on Page 1) from receptacle labeled “LED SPA LIGHT” (See *Figure 2*, to the right).
7. Plug in replacement Light Board into the receptacle.


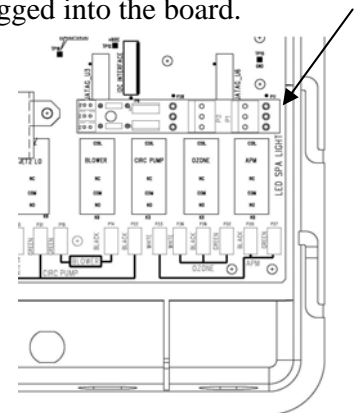



Figure 2 - IQ 2020

Note: Make sure the harness(es) are plugged into the appropriate receptacles (see *figure 3*, second page).

1 PILLOW PLUG TOP HEADER ONLY (JJ)



2 PILLOW PLUG BOTTOM 2 HEADERS ONLY (VV, KK, II, AR)



3 PILLOW PLUG ALL HEADERS (GG, SS)




Figure 3 – Harness Placement