

# I<sup>2</sup>C Interface Assembly Replacement Instructions

## Tools Required:

- Phillips Screwdriver (used to open the equipment compartment and control box.)

## I<sup>2</sup>C Kit Includes:

- I<sup>2</sup>C Interface Assembly (provides communication between receiver and spa.)



I<sup>2</sup>C Interface  
Assembly  
(1116310)


1. **DISCONNECT ALL POWER** to spa.
2. Remove the spa equipment compartment door.
3. Remove the cover from the control box.

## STEP 4



Attach the I<sup>2</sup>C Interface Assembly to the Communication Cable from the Receiver.

## STEP 5

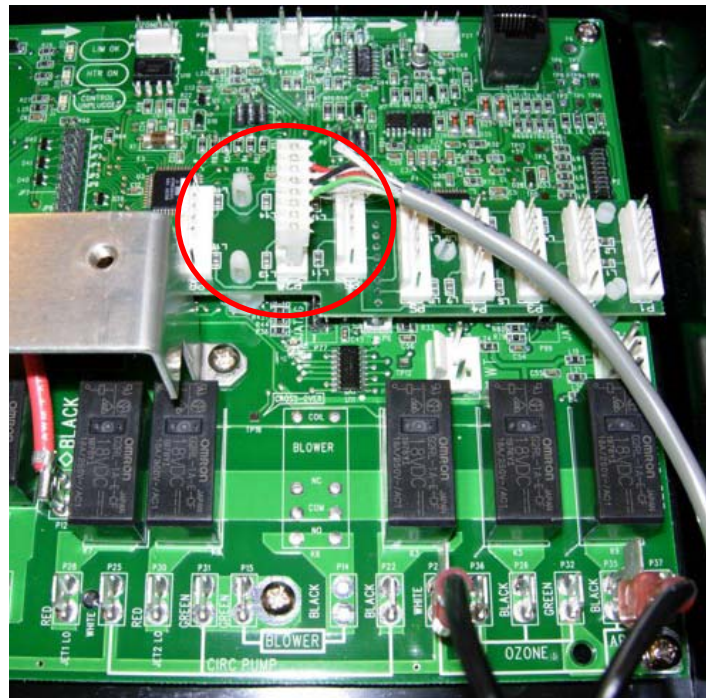

Attach the other end of I<sup>2</sup>C Interface Assembly to the hub inside the control box (8 Port Hub shown).